



Transformer controller VRTE C


ÖSTBERG 

For manual 5-step voltage control of single-phase motors, with 0-position.
 Regulation controlled by switch at front. Operation Indicator light on the housing.
 The controller is enclosed in a durable PVC.

Outgoing voltages:
 VRTE C: 80V, 110V, 140V, 170V and 230V

TECHNICAL DATA	8400001 VRTE C
Voltage	230 V
Frequency	50 Hz
Optional frequency	60 Hz
Current	1 A
Weight	1.3 kg
Enclosure class	54 IP

DIMENSIONS

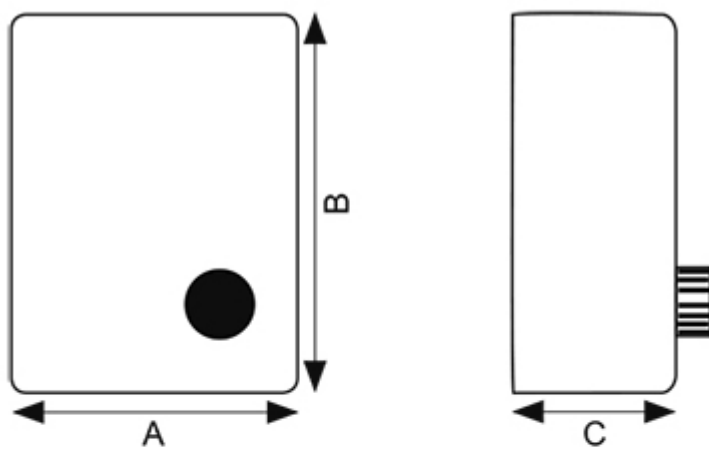

Type	(mm) A	B	C	Enclosure
VRTE C	84	160	88	PVC
VRTE 1	115	205	100	PVC
VRTE 3	170	255	140	PVC
VRTE 5	170	255	140	PVC
VRTE 7	200	305	140	PVC
VRTE 13	300	325	185	Steel