




## ECO 160P/500 FLOW ROOF FAN

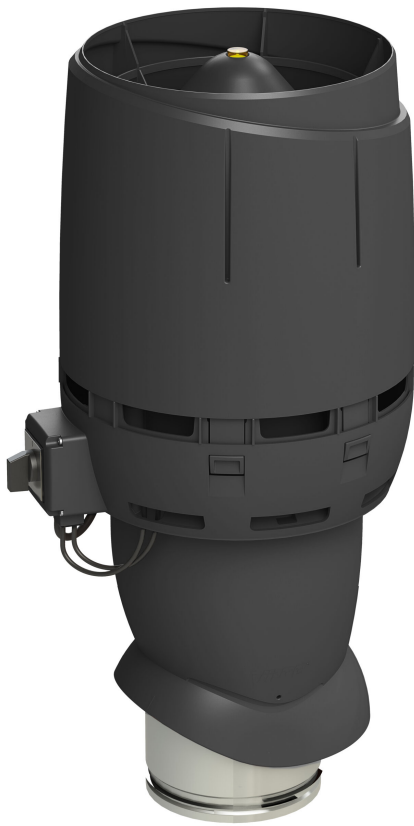

Color  
Product number  
LVI Code  
EAN Code  
Weight

Black | RR33 | RAL9005  
350252

6410453502527  
Gross: 6.757kg, Net: 5.574kg

Description: Energy-efficient insulated roof fan with FLOW cowl and EC motor (with 0-10V control voltage). Includes a galvanized steel inner pipe with a lip seal. VILPE ECo control panels and VILPE pass-throughs suitable for a range of roofing types and material are available separately.

Dimensions: Duct size Ø 160 mm, external Ø 225 mm, height above roof approx. 500 mm.


Contents: Roof fan, screws, installation, operating and maintenance instructions.

## ECO 160P/500 FLOW ROOF FAN

### TECHNICAL SPECIFICATIONS


Duct size	160 Ø
Voltage	230V/50Hz
Current	0,7 A
Rotation speed (rpm)	2580 rpm
Power	85 W
Fan type	EC

## ECO 160P/500 FLOW ROOF FAN

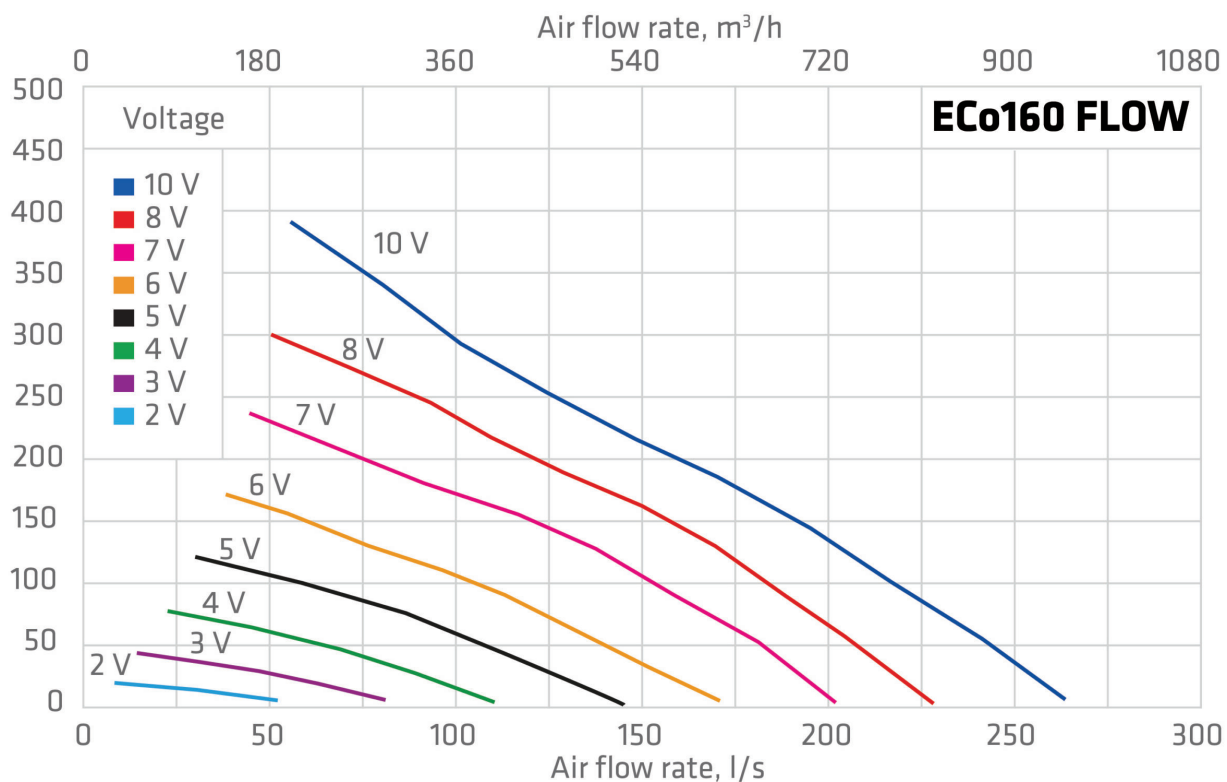



## ECO 160P/500 FLOW ROOF FAN

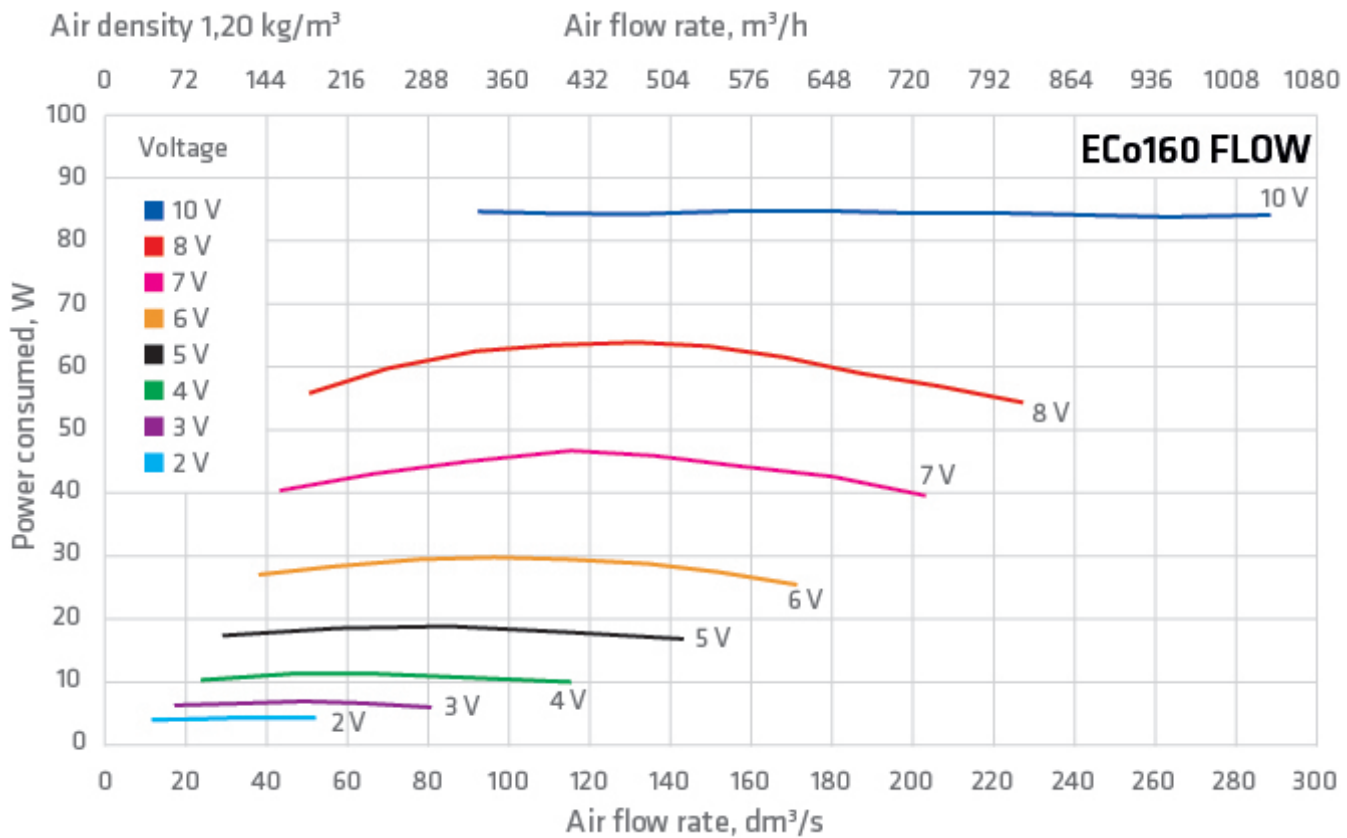



## ECO 160P/500 FLOW ROOF FAN

### EC0160 FLOW

ISO 5801:2017, liitöntätapa C-05


Ilman tiheys 1,20 kg/m<sup>3</sup>

Nimellinen liitoshalkaisija Ø160 mm

U	V	2	3	4	5	6	7	8	10
qv	dm <sup>3</sup> /s	32.1	49.1	68.5	86.2	113	135	149	170
pF	Pa	15.8	31.0	49.2	77.5	94.5	130	164	182
Pe	W	4.1	6.8	11.4	19.2	29.7	46.3	63.8	82.6
N	1/min	616	879	1145	1430	1699	2000	2228	2431
Duct									
LW63	dB	*	*	*	64.0	65.2	68.1	69.7	71.6
LW125	dB	*	59.6	63.3	70.9	70.5	72.9	74.3	76.3
LW250	dB	*	50.8	57.7	62.6	66.4	70.0	72.4	72.9
LW500	dB	38.4	45.8	51.4	55.8	59.6	62.8	65.0	67.1
LW1000	dB	30.9	40.8	47.1	51.9	55.7	59.2	61.4	63.2
LW2000	dB	*	30.4	39.5	46.3	51.5	55.0	57.5	59.7
LW4000	dB	*	*	*	38.0	44.0	49.4	52.9	55.8
LW8000	dB	*	*	*	*	37.2	44.1	48.4	51.4
LW	dB	*	62.6	*	72.4	73.1	75.9	77.7	79.3
LWA	dB(A)	*	48.6	54.1	60.3	62.5	66.0	68.3	70.1
Environment									
LW63	dB	*	*	*	*	48.9	51.9	54.2	54.6
LW125	dB	*	44.2	47.8	54.1	54.0	56.9	59.4	62.4
LW250	dB	*	43.9	50.4	54.4	57.9	61.7	64.5	65.9
LW500	dB	*	43.8	49.4	53.9	58.4	61.8	63.0	65.2
LW1000	dB	*	43.0	49.6	54.4	58.2	62.0	64.2	66.1
LW2000	dB	*	38.2	46.4	53.2	58.4	62.6	65.3	67.5
LW4000	dB	*	*	36.7	44.7	50.7	56.1	59.8	62.9
LW8000	dB	*	*	*	38.1	46.8	53.9	58.3	61.4
LW	dB	*	*	56.3	61.2	65.0	68.9	71.3	73.5
LWA	dB(A)	*	46.5	53.3	58.8	63.3	67.5	70.1	72.4



## ECO 160P/500 FLOW ROOF FAN

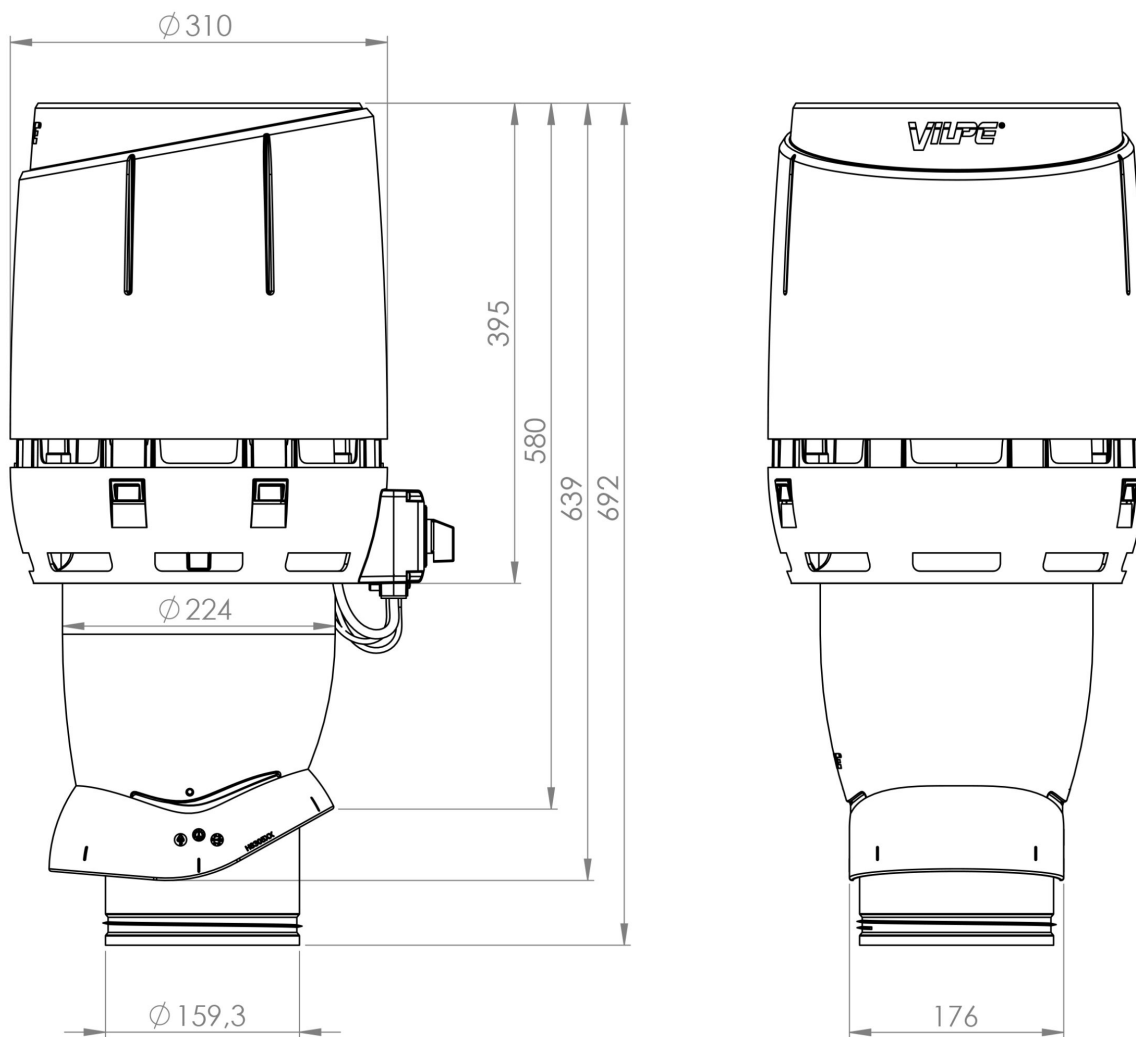


Copyright © 2018 VILPE Oy. All rights reserved.




## ECO 160P/500 FLOW ROOF FAN

### Speed Controller

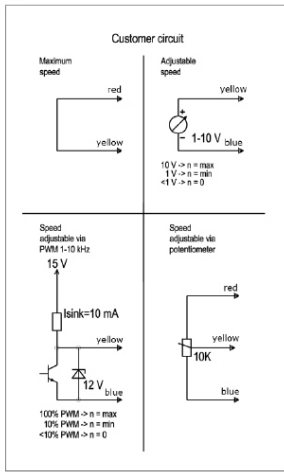

Main supply  
230V 50Hz, AC

Counter  
Controller  
Alarm  
Speed display



### ECO 110 FLOW, ECO125 FLOW, ECO 160 FLOW, ECO 200 FLOW

